

# STEP Machine Stretch Film - 5 main types

Width 500mm or Ø76 core - Covers most application demands

## STEP SOFT


STEP Soft Film is designed for Gently Secures soft and light loads.

Features:

- Perfect for high pre-stretch applications
- Controlled tension in soft and light loads
- Excellent sealing properties at end process
- Good stability for high pre-stretch

Available:

- 500mm
- 12my to 35my
- Natural and colours
- Automatic, semi-jumbo and jumbo rolls

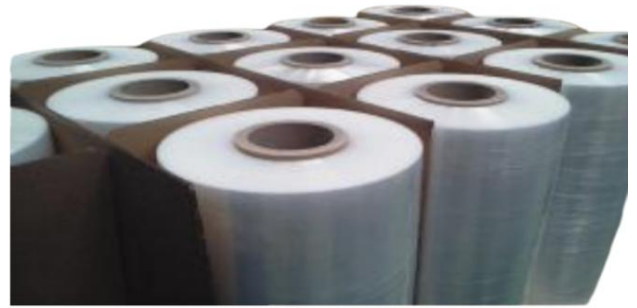

Technical Details							
Item No.	54015012	54015015	54015017	54015020	54015023	54015030	54015035
Thickness (μ)	12	15	17	20	23	30	35
Length Machine Roll (mtr)	2850	2281	2013	1711	1488	1141	978
Pre-stretch (% Min)	240	255	265	290	320	335	355
Tear Resist MD/TD ASTM-D1922(gr)	189/446	225/496	253/526	286/589	320/643	486/837	546/877
Puncture Resistance ASTM-D5748 (gr*cm/μ)	597	580	563	523	497	354	312
Tensile Strength MD/TD ASTM-D882 (N/mm <sup>2</sup> )	62/48	59/45	55/41	51/38	47/35	34/27	31/25
Elongation at Break MT/TD ASTM- D882(%)	430/876	520/910	565/950	610/959	683/964	750/999	785/1010

