

STEP MATRIX

STEP Matrix Film is designed for Extreme resistance to tear and functions.

Features:


Film for extreme pre-stretch conditions

Special formulation for:

- Higher puncture resistance
- Extreme tear resistance
- Superior tensile strength at break

BEst ratio cost per pallet

Less film consumption- Ecofriendly

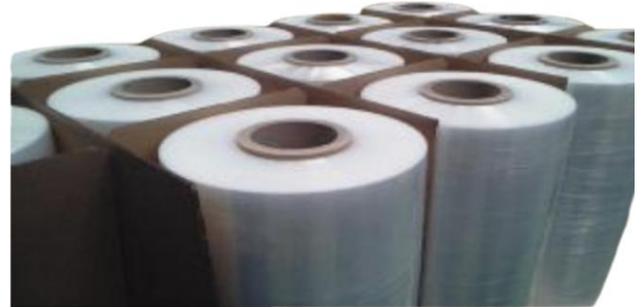

Available:

500mm

12, 14, 17 and 20my

Natural film

Automatic and Jumbo rolls

Technical Details				
Item No.	54035012	54035014	54035017	54035020
Thickness (μ)	12	14	17	20
Length Machine Roll (mtr)	2850	2281	2013	1711
Pre-stretch (% Min)	275	315	335	350
Tear Resist MD/TD ASTM- D1922(gr)	192/338	214/354	217/454	341/485
Puncture Resistance ASTM-D5748 (gr*cm/μ)	1590	1325	1104	933
Tensile Strength MD/TD ASTM-D882 (N/mm2)	23/20	22/19	21/18	23/23
Elongation at Break MT/TD ASTM- D882(%)	381/469	399/498	443/567	444/568

